

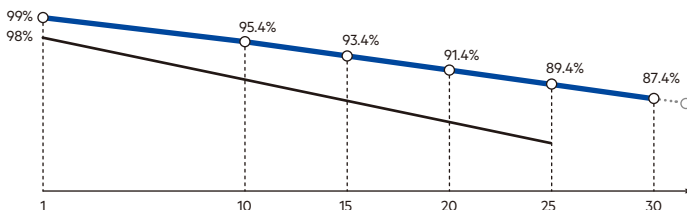
DHN-60X16/FS(BB)
475~490W

Full Screen

No Dust and Dirt on the Surface Increases Power Generation

Quality Guarantee

25-year Material & technology warranty
30-year Linear power output warranty



DAH Solar linear power output guarantee
Standard linear power output guarantee

Comprehensive Products & System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001: 2018/International standards for occupational health & safety
ISO 14001: 2015/Standards for environmental management system
ISO 9001: 2015/Quality management system



Global Patented Full Screen Technology,
no dust or snow accumulation, increase power generation by 6-15%



Higher power, longer service life
linear power warranty for 30 years



TOPCon cells have a lower decay rate,
≤ 1% in the first year and ≤ 0.4% in the second year




Lower temperature coefficient,
better high-temperature resistance, reduced power loss



LECO laser assisted sintering technology,
reduces contact resistance and improves efficiency by 0.2% -0.5%

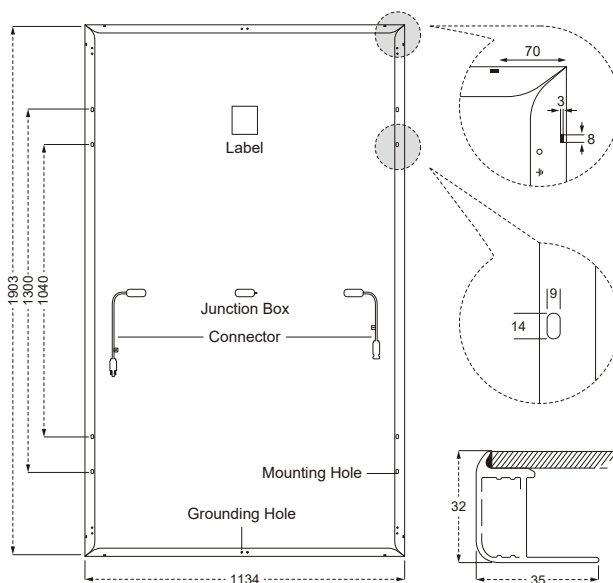
DHN-60X16/FS(BB)

475~490W**Mechanical Specification**

Cable	4.0mm ² , 300/200mm in length,
(Including connector)	length can be customized
No.of Cells	120 (6×20)
Glass	3.2mm High Transmission, Antireflection Coating
Junction box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	21.6kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	1903×1134×32mm
Packing	34pcs/Pallet, 816pcs/40HQ

Operating Parameters

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	25A
Snow load, frontside/Wind load, backside	5400Pa/2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

Design**STC——Electrical Characteristics**

Module Type	DHN-60X16/FS(BB)			
Maximum Power (P _{max} /W)	475	480	485	490
Open-circuit Voltage (V _{oc} /V)	42.6	42.8	43.0	43.2
Maximum Power Voltage (V _{mp} /V)	36.2	36.4	36.6	36.8
Short-circuit Current (I _{sc} /A)	13.96	14.02	14.08	14.14
Maximum Power Current (I _{mp} /A)	13.12	13.19	13.25	13.32
Module Efficiency (%)	22.01	22.24	22.47	22.71

Power Tolerance: 0~+5W, Temperature Coefficient of I_{sc}: 0.046%/°C, Temperature Coefficient of V_{oc}: -0.25%/°C, Temperature Coefficient of P_{max}: -0.29%/°C

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT——Electrical Characteristics

Maximum Power (P _{max} /W)	357	361	365	368
Open-circuit Voltage (V _{oc} /V)	40.47	40.66	40.85	41.04
Maximum Power Voltage (V _{mp} /V)	34.39	34.58	34.77	34.96
Short-circuit Current (I _{sc} /A)	11.27	11.32	11.37	11.42
Maximum Power Current (I _{mp} /A)	10.39	10.44	10.49	10.54

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve